



AC-270M/156-60S AC-290M/156-60S
 AC-275M/156-60S AC-295M/156-60S
 AC-280M/156-60S AC-300M/156-60S
 AC-285M/156-60S

www.axitecsolar.com

-AXITEC
high quality german solar brand

AXIpremium

60 cell monocrystalline
High performance solar module

The advantages:








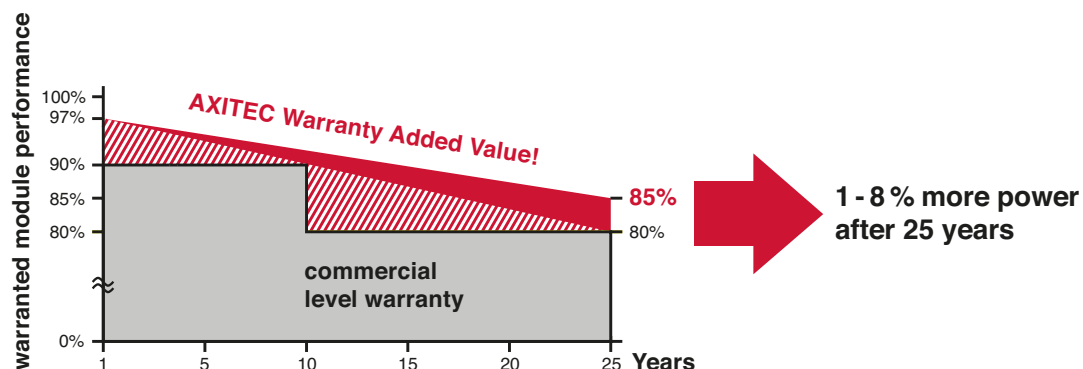
- 
 15 years manufacturer's warranty
- 
 Highest performance due to specifically selected technologies and materials
- 
 Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 
 Maximum 5400 Pa snow load
- 
 100% electroluminescence inspection
- 
 High stability due to AXITEC-Soft-Grip-Seam aluminium frame construction
- 
 High quality junction box and connector systems



Fig. similar 60M156EN180321A

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90 % of the nominal performance
- 25 years manufacturer's guarantee on 85 % of the nominal performance



AXI premium

AC-270M/156-60S AC-290M/156-60S
AC-275M/156-60S AC-295M/156-60S
AC-280M/156-60S AC-300M/156-60S
AC-285M/156-60S

www.axitecsolar.com

AXITEC

high quality german solar brand

Distributed by:



Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1,5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-270M/156-60S	270 Wp	30,94 V	8,80 A	9,41 A	39,26 V	16,60 %
AC-275M/156-60S	275 Wp	31,20 V	8,86 A	9,50 A	39,32 V	16,90 %
AC-280M/156-60S	280 Wp	31,50 V	8,95 A	9,55 A	39,45 V	17,21 %
AC-285M/156-60S	285 Wp	31,59 V	9,09 A	9,68 A	39,56 V	17,52 %
AC-290M/156-60S	290 Wp	31,71 V	9,16 A	9,70 A	39,70 V	17,83 %
AC-295M/156-60S	295 Wp	31,80 V	9,29 A	9,75 A	39,95 V	18,13 %
AC-300M/156-60S	300 Wp	32,16 V	9,34 A	9,82 A	40,08 V	18,44 %

Design

Frontside	3,2 mm hardened, low-reflection white glass
Cells	60 monocrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	35 mm silver anodized aluminium frame

Mechanical data

L x W x H	1640 x 992 x 35 mm
Weight	18,0 kg with frame

Power connection

Socket	Protection Class IP67 (3 bypass diodes)
Wire	approx. 1,1 m, 4 mm ²
Plug-in system	Plug/socket IP67

Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m ²
Reverse current feed IR	16,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0,30 %/K
Current I _{sc}	0,04 %/K
Output P _{mpp}	-0,40 %/K


Low-light performance

 (Example for AC-300M/156-60S)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2,15 A	30,17 V
400 W/m ²	3,71 A	31,20 V
600 W/m ²	6,05 A	31,81 V
800 W/m ²	7,57 A	32,10 V
1000 W/m ²	9,34 A	32,16 V

Packaging

Module pieces per pallet	30
Module pieces per HC-container	840

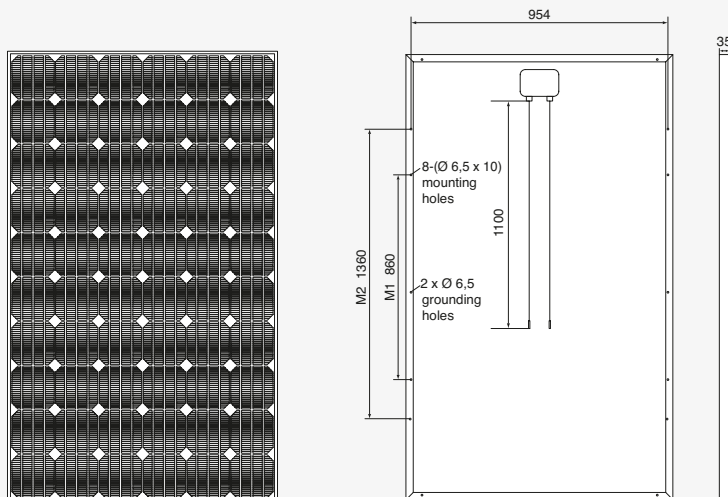

All dimensions in mm