





S-Dome 10° System

The solution for
single-sided elevation

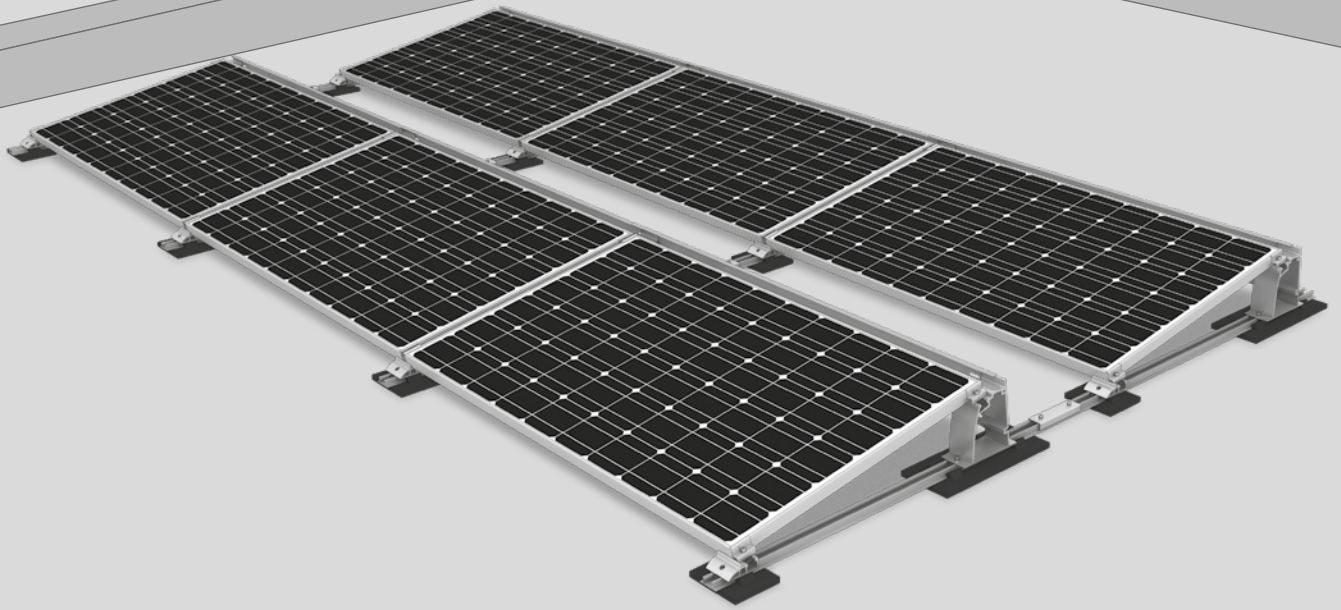


- ▶ A system for structurally challenging roofs with limited ballast options
- ▶ Aerodynamically optimised as a result of wind tunnel testing
- ▶ Quick and easy handling
- ▶ Also available as a short rail system

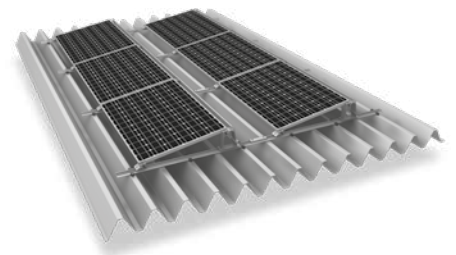

S-Dome can also be mounted on trapezoidal sheet metal roofs.

Components



Dome S1000 and Dome SD

- ▶ Module support elements for one-sided elevations
- ▶ Suitable for module widths of up to approx. 1100 mm



SpeedRail with building protection mats

- ▶ SpeedRail available as short or long rails
- ▶ Laminated or unlaminated building protection mats, depending on roof covering material




Windbreaker

- ▶ Wind deflection on the rear of Dome systems
- ▶ Various lengths available



Ballast Management

SpeedPorter: For quick and easy ballasting

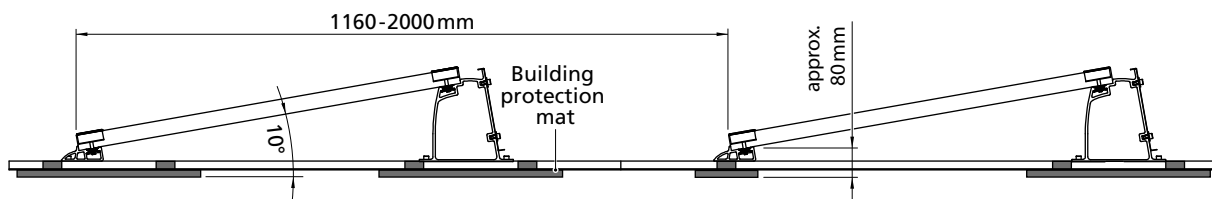

Technical data

	S-Dome
Scope of application	Flat roofs $\leq 5^\circ$ with single ply membrane or bituminous roof covering, also on concrete, gravelled or green roofs; also trapezoidal sheet metal roofs with continuous mounting rails
Fastening type/roof fixture	Ballasted; no roof penetration for inclination $\leq 3^\circ$
Requirements	<ul style="list-style-type: none"> ▶ Permissible module dimensions (L x W x H): 1386 - 2067 x 950 - 1100 x 30 - 50 mm ▶ Minimum system size: 2 modules ▶ Module approved for corner clamping (see k2-systems.com/en/approved-modules)
Technical specifications	<ul style="list-style-type: none"> ▶ Thermal separation after max. 11 m (trapezoidal sheet metal 8.4 m) ▶ Minimum clearance to roof edge 600 mm
Inclination angle	10°
Material	<ul style="list-style-type: none"> ▶ Mounting rails, S-Dome, Dome SD, Windbreaker, module clamps, rail connectors: Aluminium EN AW-6063 T66 ▶ Building protection mat with or without aluminium lining (PUR-bound rubber granules) ▶ Small parts: Stainless steel (1.4301) A2-70